



SupercreteTM

90mm Deep Timber Joists



Copyright © Supercrete Limited 2008

Without limiting the rights of the copyright above, no part of this publication shall be reproduced (whether in the same or a different dimension), stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording or otherwise), without the prior permission of the copyright owner.


**Construction R Values for Supercrete™
75mm Soundfloor with 90mm Deep Timber Joists**

Joist Spacing	Insulation				
	None	R1.3 Board	R1.3 blanket	R2.0 blanket	R2.6 blanket
360mm	0.58	1.98	1.68	2.17	2.5
450mm	0.57	1.96	1.7	2.21	2.59
600mm	0.56	1.94	1.72	2.27	2.69
Solid 1a, 2a & 3a	1.5	1.5	1.5	1.5	1.5
All non-solid; 1b, 2b & 3b solid	1.3	1.3	1.3	1.3	1.3

1. For open/exposed sub-floors. Add the R Values for ground under a suspended floor (see separate sheet) to the above figures
2. Add floor covering R Values to the above figures

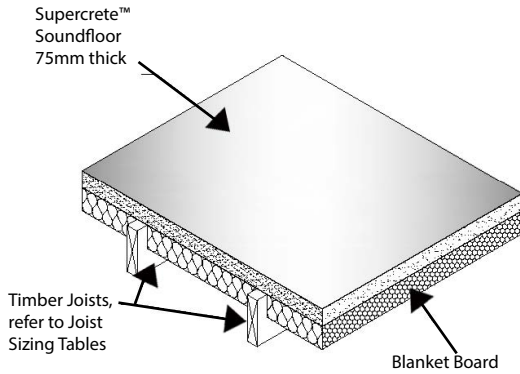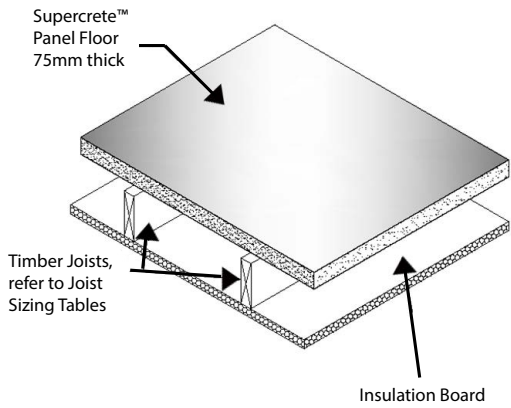

**Construction R-values for Supercrete™ 75mm Panel
Flooring with 90mm deep Timber Joists**

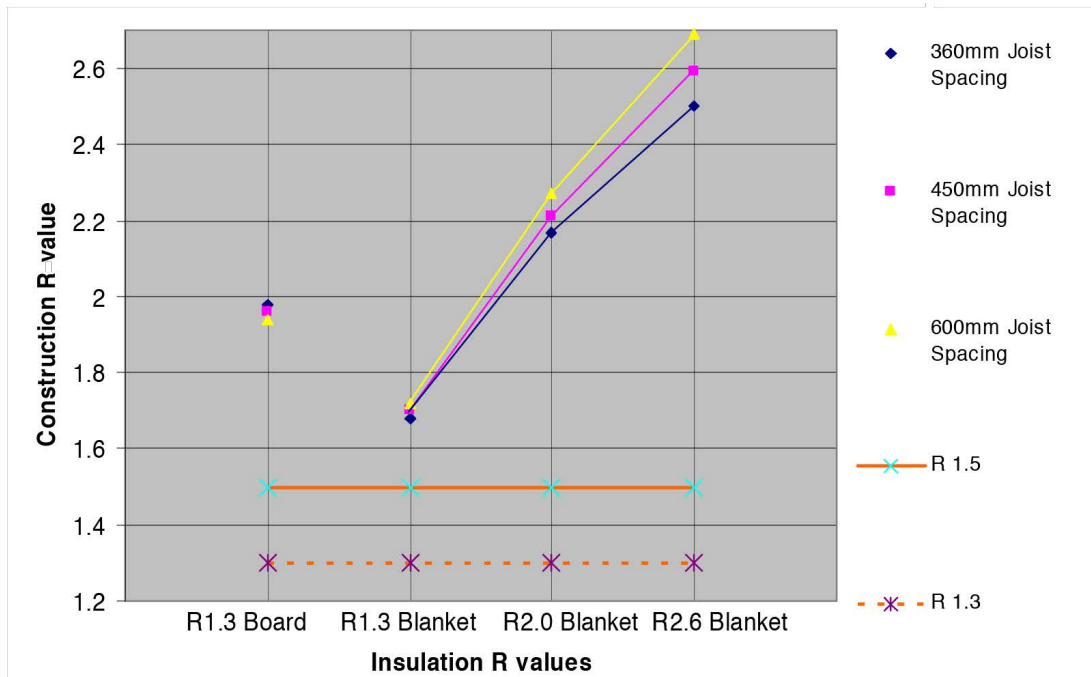

1. For open/exposed sub-floors. Add the R-values for ground under a suspended floor (separate sheet) to the above figures
2. Add floor covering R-values to the above figures
3. Line R 1.5 is NZBC minimum required for Solid Construction (excluding solid timber) for Zones 1a, 2a & 3a
4. Line R 1.3 is NZBC minimum required for Non-solid Construction for all Zones & Zones 1b, 2b & 3b for Solid Construction (excluding solid timber)