


Mid Floor Band

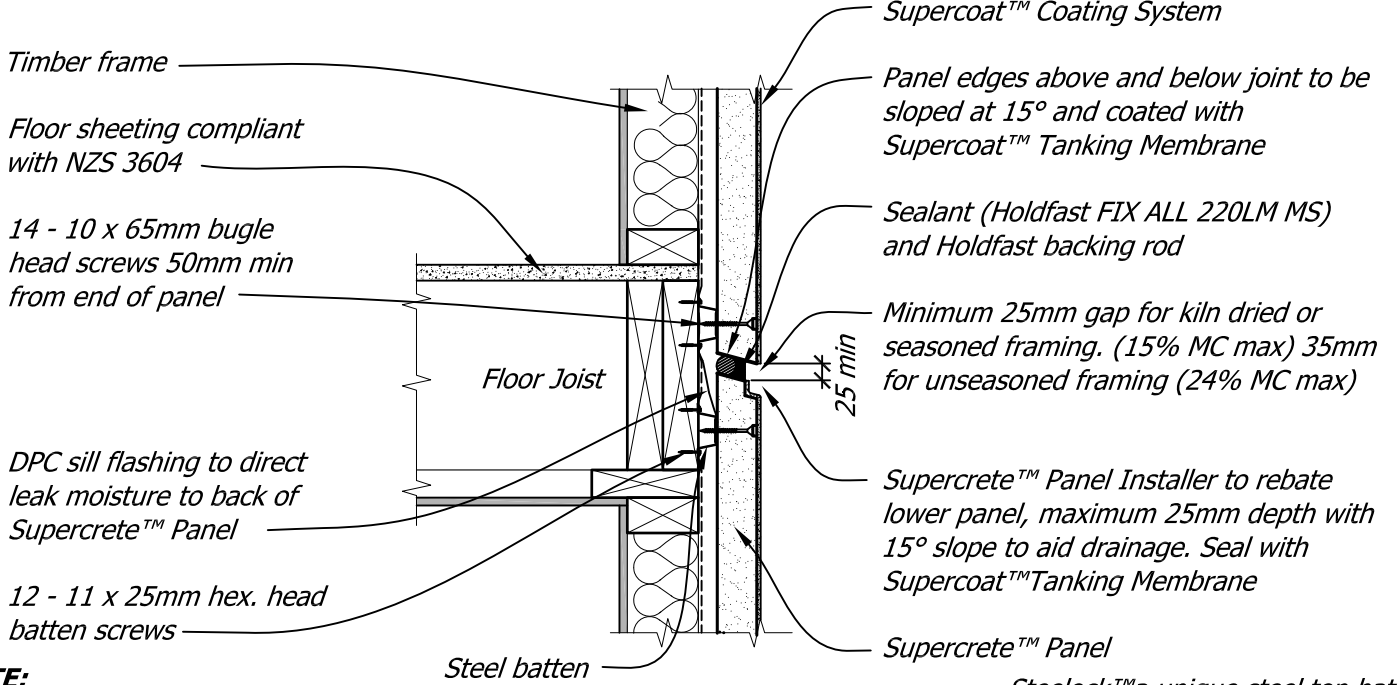

Negative Detail

NOTE:

1. Maximum size rebated edge cuts in panel to be 25mm square.
2. Panel ends will be cut to a 15° slope and coated with Supercoat™ Tanking Membrane prior to installation

Steelock™ a unique steel top hat batten mounting system.
 Thermosteel™ a unique thermally efficient closed cavity cladding

Copyright © Superbuild International Ltd 2013

Supercrete™	Title: Horizontal Control Joints	
	Date: February 2014	Detail No. SPC 3-7
PANEL CLADDING CONSTRUCTION	This drawing must be read in conjunction with the Supercrete Panel Cladding System Design & Installation Guide	